


FILE NO.	
PART NO.	

REV.	DESCRIPTION	DATE	CONTROL	APPROV.
XI	RELEASE TO PRODUCT	2008/10/20		

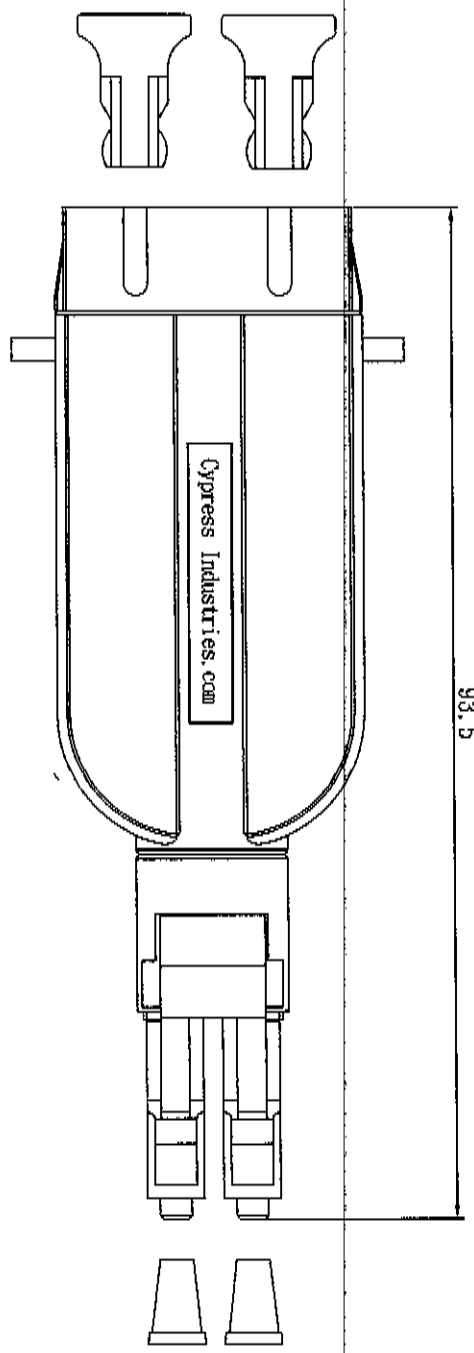

- NOTES:
1. CONNECTOR SPECIFICATION :
SC CONNECTOR IS PER JIS C5973 F04 TYPE CONNECTOR
LC CONNECTOR COMPLIANT WITH EIA/PAS 61754-20 STANDARD.
 2. FIBER SPECIFICATION :
M.M. OPTICAL FIBER IS 62.5/125 UM
TIGHT BUFFER CABLE OD ϕ 0.9mm PVC JACKET
 3. ADAPTOR SPECIFICATION (ϕ 1310mm):
SPLIT SLEEVE: ZrO2
RETENTION FORCE : 200GF(1.96N)~600GF(5.88N).
INSERTION LOSS: \leq 0.5 dB
WAVELENGTH: 1310nm.
 4. OPERATING TEMPERATURE: -20°C~+75°C
STORAGE TEMPERATURE: -40°C~+75°C
HUMIDITY: 95% R.H. (NON-CONDENSING)
 6. P/N: FAM2SCFLCM

MATERIAL	QUANTITY	DATE	DATE	DATE	DATE
PROJECT	DATE	DATE	DATE	DATE	DATE
CHECKED	DATE	DATE	DATE	DATE	DATE
APPROVED	DATE	DATE	DATE	DATE	DATE
DATE	DATE	DATE	DATE	DATE	DATE

8 7 6 5 4 3 2 1